


Pull-out shelf lock

Planning


TANDEM – 560H

Space requirement in cabinet

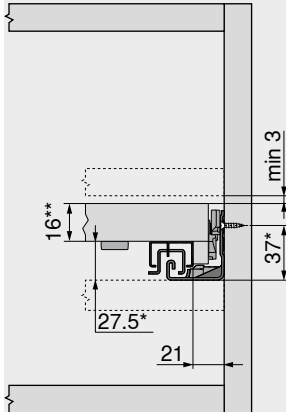


- * +3 mm with side stabiliser or +1 mm with TIP-ON
 ** Min. 25 mm when installed in compartment

Pull-out shelf

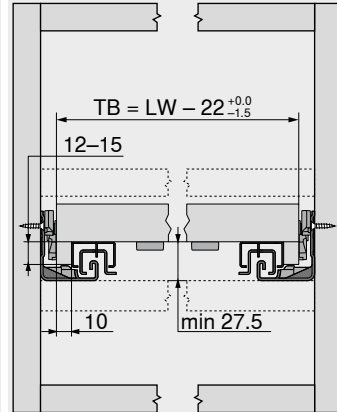


- TB Shelf width
 LW Internal cabinet width

Pull-out shelf

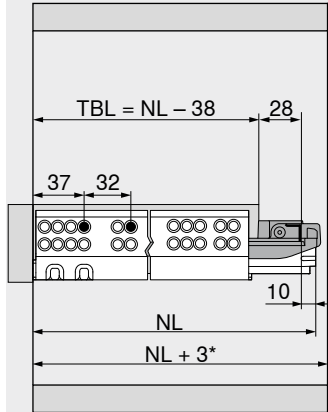

- TBL Pull-out shelf base length
 NL Nominal length
 * Additional +12 mm with side stabilisation


POS inset application

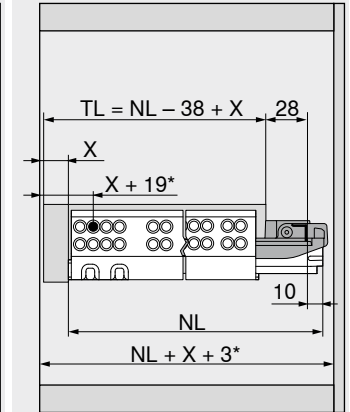

- TL Shelf length
 NL Nominal length
 X Pull-out shelf front piece thickness
 * Additional +2 mm with POSISTOP or additional +4 mm with TIP-ON


TANDEM – 561H

Space requirement in cabinet

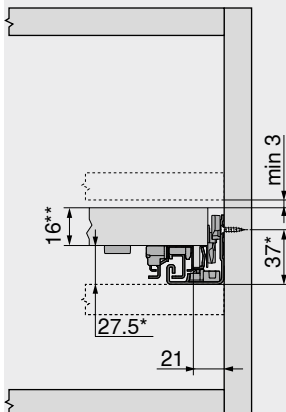


- * +3 mm with side stabiliser or +1 mm with TIP-ON
 ** Min. 25 mm when installed in compartment

Pull-out shelf

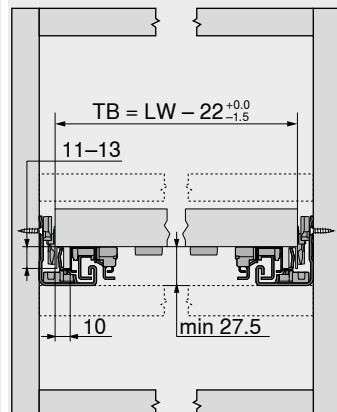


- TB Shelf width
 LW Internal cabinet width

Pull-out shelf

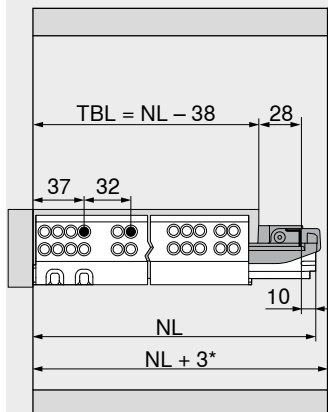

- TBL Pull-out shelf base length
 NL Nominal length
 * Additional +12 mm with side stabilisation

POS inset application

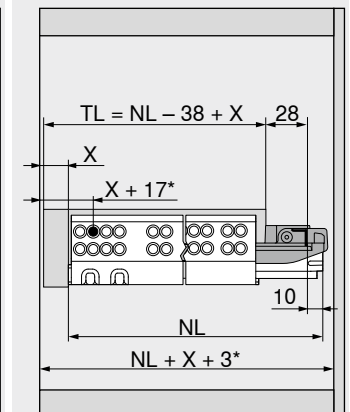

- TL Shelf length
 NL Nominal length
 X Pull-out shelf front piece thickness
 * Additional +4 mm with TIP-ON

Reference pages

- Overview
 Attachment of runners
 E-SERVICES and assembly devices
 More technical details

447 Pull-out shelf lock

490

590

698

Short URL

www.blum.com/i010

Assembly, removal and adjustment

Short URL

www.blum.com/a420

