
# Pull-out shelf lock



- Can be used with TANDEM full extensions
- Cannot be used with TANDEM single extensions
- Can be combined with **BLUMOTION** and **TIP-ON**
- Two-sided locking mechanism
- Secure hold
- Pull-out shelf lock can be released with one hand thanks to synchronisation shaft
- Easy assembly fittings serve as template
- Runners are attached to standard fixing positions
- Max. cabinet width 1200 mm



#### Order information Pull-out shalf lock 12

	ruii-out sileii lock		
3	Runners	Colour	Part no.
	560H   561H	Orion grey matt	295H5700
	560F   561F		295F5700
sisting of			

### Cons

2 x Locking mechanism unit 12a

Fixing only possible with chipboard screws

2 x Latching element

Fixing possible with chipboard and system screws

1 x Installation instructions

### Note

During assembly of the pull-out shelf lock, make sure that you leave the tilt adjustment at the factory setting!

We recommend using a side stabiliser with wide pull-outs with a short nominal length. This improves the engagement of the locking unit in combination with 560H | 561H.

12c	Synchronisati	Synchronisation linkage		
	Version	Length (mm)	Part no.	
	Round	1089	ZST.1089W	
Pull-out shelf lock can be released with one hand thanks to synchronisation shaft				
Cutting				
560H   561	560H   561H Internal cabinet width LW – 87 mm +1 mm			


560H | 561H 560F | 561F Internal cabinet width LW – 94 mm ±1 mm


### Alternative to 12c

12C	Synchronisation linkage		
	Version	Length (mm)	Part no.
	Round	1160	ZST.1160W

Pull-out shelf lock can be released with one hand thanks to synchronisation shaft


Accessories				
_		Chipboard screws		
	7	Diameter (mm)	Length (mm)	Part no.
	ij.	Ø 3.5	15.0	609.1500
_		System screw		
	20	Diameter (mm)	Length (mm)	Part no.
	B .	Ø 6.0	14.5	661.1450.HG

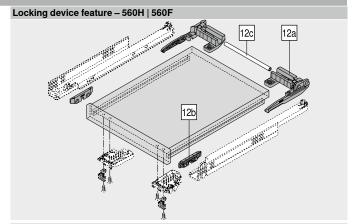







## **POS** processing



NL	Nominal length
LW	Internal cabinet width
TB	Shelf width
TL	Shelf length
TBL	Pull-out shelf base length
TSBL	Pull-out shelf side panel length
Χ	Pull-out shelf front piece thickness
Υ	Pull-out shelf base thickness
*	29 mm with TANDEM 19 mm



Single pull-out shelf base		
Runners	A (mm)	
560H   560F	12-15	
561H   561F	11-13	



Double pull-out shelf base		
Runners	A (mm)	
560H   560F	12-15	
561H   561F	11-13	

482 Catalogue 2022/2023 • KA-150